



GOLDEN SOLAR

Make Solar Energy More Efficient!

JGDN120-0BB

HJT Bifacial Module



Based on 210 mm wafer, N-type bifacial HJT half-cut cells



Module power up to 675W; module efficiency up to 23.85%



OBB thin-slice half-cut technology, using a stencil printing process and silver-coated copper



Power output from the front is 4.1% more than that of TOPCon module



Anti Boron-Oxygen-Induced Degradation (BO-LID), excellent anti-LeTID & anti-PID performance. Low power degradation, and high energy yield



Bifaciality up to 90%

650W~675W




Size > 2 m²



15-Year Warranty for Materials and Processing



30-Year Warranty for Extra Linear Power Output

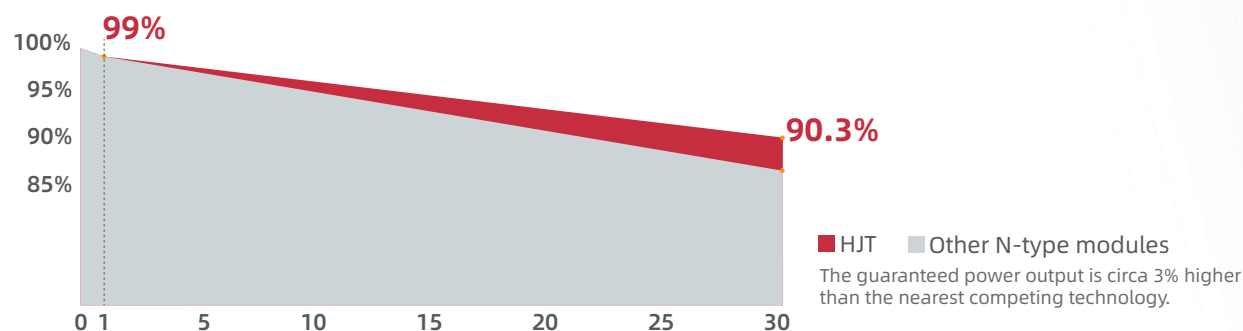

JGDN120-0BB



GOLDEN SOLAR



STC STC (Standard Test Conditions): Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass 1.5.

Model	JGDN120-650	JGDN120-655	JGDN120-660	JGDN120-665	JGDN120-670	JGDN120-675
Power Tolerance (0~+5W)	STC	STC	STC	STC	STC	STC
P _{max} (W)	650	655	660	665	670	675
V _{mp} (V)	38.88	39.01	39.15	39.28	39.41	39.56
I _{mp} (A)	16.72	16.79	16.86	16.93	17.00	17.06
V _{oc} (V)	45.86	46.02	46.18	46.34	46.50	46.66
I _{sc} (A)	17.53	17.64	17.75	17.86	17.97	18.08
Panel Efficiency (%)	22.97	23.14	23.32	23.50	23.67	23.85

BSTC BSTC (Bifacial Standard Test Conditions): Front Side Irradiation 1000 W/m², Back Side Reflection Irradiation 135 W/m², Air Mass 1.5, Ambient Temperature 25°C.

Model	JGDN120-650	JGDN120-655	JGDN120-660	JGDN120-665	JGDN120-670	JGDN120-675
Power Tolerance (0~+5W)	BSTC	BSTC	BSTC	BSTC	BSTC	BSTC
P _{max} (W)	728	734	739	745	750	756
V _{mp} (V)	38.88	39.01	39.15	39.28	39.41	39.56
I _{mp} (A)	18.73	18.80	18.88	18.96	19.04	19.11
V _{oc} (V)	45.86	46.02	46.18	46.34	46.50	46.66
I _{sc} (A)	19.63	19.76	19.88	20.00	20.13	20.25

Electrical Curves (675W):

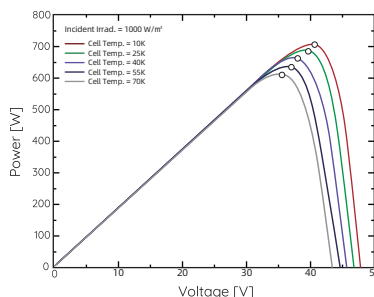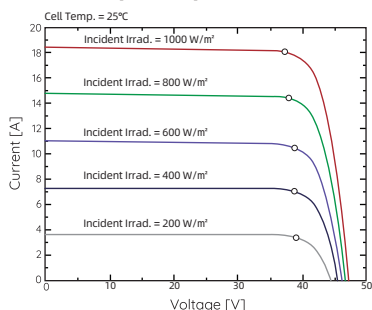

Mechanical Specification

Solar Cell Type	120 half-cut, N-type, HJT cells
Module Dimensions	2172 × 1303 × 35 mm
Module Weight	35.5 kg
Front Side	Anti-reflective coated solar glass, 2.0 mm thick
Back Side	Solar glass, 2.0 mm thick
Frame	Anodized aluminum
Junction Box	3 bypass diodes, IP68 rated to IEC 62790
Cable	4 mm ² PV cable, 0.45 m long (lengths can be customized), complies with EN 50618
Connector	MC4 EVO2

Properties of System Design

Maximum System Voltage	1500V
Maximum Series Fuse Rating	35A
Snow Load	5400Pa
Wind Load	2400Pa
Fire Class	IEC Class C, UL Class C, UNI Class 1
Protection Class	Class II
Operating Temperature	-40 to + 85°C

Temperature Coefficients

Temperature Coefficient of I _{sc}	+0.033 %/K
Temperature Coefficient of V _{oc}	-0.243 %/K
Temperature Coefficient of P _{max}	-0.242 %/K
Nominal Module Operating Temperature (NMOT)	43±3°C



Janergy GmbH / Golden Solar Europe
www.janergy.de
+49 2224 919 90 98
info@janergy.de

Comprehensive Certificates


- IEC 61215, IEC 61730
- UNI 9177, UL 790, MCS, PVEL
- ISO 9001, ISO 14001, ISO 45001

Packing

31 pcs/pallet, 558 pcs/40'HQ container

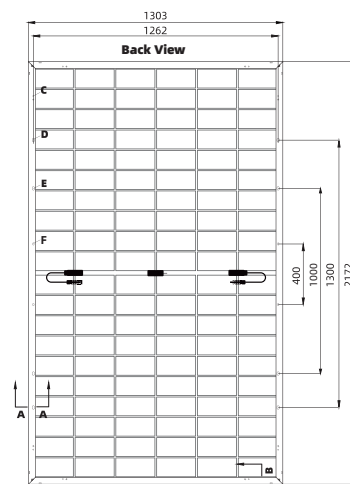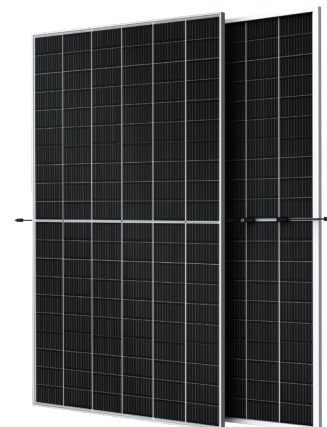

Unit:mm
Tolerance:Length: ±2mm Width: ±2mm



*The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the ongoing innovation and product enhancement. Golden Solar reserves the right to make necessary adjustments to the information described herein at any time without further notice.